

Tech Specs



Pod™

PowerPod™

SuperPod™

Colors



Silver Champagne




Silver Champagne




Silver Champagne

Size and Weight

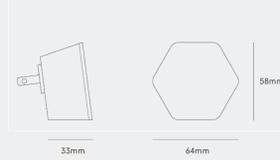


64mm W x 58 mm H x 33mm D
Not including plug

Weight
92g

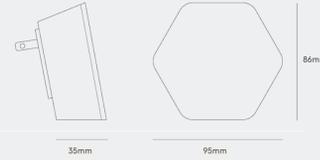

95mm W x 86mm H x 35mm D
Not including plug

Weight
192g

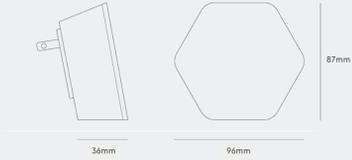

96mm W x 87mm H x 36mm D
Not including plug

Weight
217g

Wi-Fi and Ethernet Interfaces

Wi-Fi Interfaces
2x2 MIMO 802.11a/n/ac 5GHz
2x2 MIMO 802.11b/g/n 2.4GHz
Dual-band, dual-concurrent radio operation

Channel Bandwidth
5GHz
20/40/80 MHz
2.4GHz
20/40 MHz

Channels
5GHz
36 to 48, 149 to 161
2.4GHz
1 to 13

DFS Channels
52 to 64, 100 to 144
Region Dependent

Ethernet
100/1000Base-T Ethernet with autosense WAN or LAN configuration

IoT Radios
Bluetooth Low Energy

Wi-Fi Interfaces
4x4 MIMO 802.11a/n/ac 5GHz
2x2 MIMO 802.11b/g/n 2.4GHz
Dual-band, dual-concurrent radio operation
5GHz MU-MIMO with Beamforming

Channel Bandwidth
5GHz
20/40/80 MHz
2.4GHz
20/40 MHz

Channels
5GHz
36 to 48, 149 to 161
2.4GHz
1 to 13

DFS Channels
52 to 64, 100 to 144
Region Dependent

Ethernet
100/1000Base-T Ethernet with autosense WAN or LAN configuration

IoT Radios
Bluetooth Low Energy

Wi-Fi Interfaces
4x4 MIMO 802.11a/n/ac 5GHz Radio 1
2x2 MIMO 802.11a/n/ac 5GHz Radio 2
2x2 MIMO 802.11b/g/n 2.4GHz
Tri-band, tri-concurrent radio operation
5GHz MU-MIMO with Beamforming

Channel Bandwidth
5GHz
20/40/80 MHz
2.4GHz
20/40 MHz

Channels
5GHz
36 to 48, 149 to 161
2.4GHz
1 to 13

DFS Channels
52 to 64, 100 to 144
Region Dependent

Ethernet
Dual 100/1000Base-T Ethernet with autosense WAN or LAN configuration

IoT Radios
Bluetooth Low Energy

Power

Power Supply
100 to 240VAC, 50 to 60Hz

Power Consumption
2W Standby
4W Average
7W Maximum

Plug Type
Type A (NA and Japan)
Type C (EU)
Type G (UK)

Power Supply
100 to 240VAC, 50 to 60Hz

Power Consumption
7W Average
10W Maximum

Plug Type
Type A (NA and Japan)
Type C (EU)
Type G (UK)

Power Supply
100 to 240VAC, 50 to 60Hz

Power Consumption
4.5W Standby
10W Average
15W Maximum

Plug Type
Type A (NA and Japan)
Type C/E/F (EU)
Type G (UK)

Environment

Operating Temperature
0°C to 35°C

Operating Relative Humidity
10% to 90%

Storage Conditions
-20°C to 70°C
10% to 90% (Relative Humidity)

Operating Temperature
0°C to 40°C

Operating Relative Humidity
10% to 90%

Storage Conditions
-20°C to 70°C
10% to 90% (Relative Humidity)

Operating Temperature
0°C to 40°C

Operating Relative Humidity
10% to 90%

Storage Conditions
-20°C to 70°C
10% to 90% (Relative Humidity)

Networking and Connectivity

Networking Modes
Auto-sensing Router or Bridge mode

Firewall and Networking
NAT, DHCP server, UPnP, client IP reservation, port forwarding

Home SSIDs
Managed 2.4 GHz and 5 GHz single SSID

Guest Access
HomePass® single network SSID with multiple unique passwords

Networking Modes
Auto-sensing Router or Bridge mode

Firewall and Networking
NAT, DHCP server, UPnP, client IP reservation, port forwarding

Home SSIDs
Managed 2.4 GHz and 5 GHz single SSID

Guest Access
HomePass® single network SSID with multiple unique passwords

Networking Modes
Auto-sensing Router or Bridge mode

Firewall and Networking
NAT, DHCP server, UPnP, client IP reservation, port forwarding

Home SSIDs
Managed 2.4 GHz and 5 GHz single SSID

Guest Access
HomePass® single network SSID with multiple unique passwords

Security

Authentication
WPA2-PSK (KRACK Patched)

Encryption
AES

Authentication
WPA2-PSK (KRACK Patched)

Encryption
AES

Authentication
WPA2-PSK (KRACK Patched)

Encryption
AES